

HRT16 Fuse

Standard: IEC 60269

Function

HRT16 fuse provide:

- Protection of circuits against overload current
- Protection of circuits against short-circuit current

Order Information

Fuse-link	Rated Current In (A)	Suitable fuse bases	Weight (g)	Reference
HRT16-00C	2	HRT16-00	123	HRT16000S2
	4			HRT16000S4
	6			HRT16000S6
	8			HRT16000S8
	10			HRT16000S10
	12			HRT16000S12
	16			HRT16000S16
	20			HRT16000S20
	25			HRT16000S25
	32			HRT16000S32
	40			HRT16000S40
	50			HRT16000S50
	63			HRT16000S63
	80			HRT16000S80
	100			HRT16000S100
HRT16-00	2	HRT16-00	170	HRT16002
	4			HRT16004
	6			HRT16006
	8			HRT16008
	10			HRT160010
	12			HRT160012
	16			HRT160016
	20			HRT160020
	25			HRT160025
	32			HRT160032
	40			HRT160040
	50			HRT160050
	63			HRT160063
	80			HRT160080
	100			HRT1600100
	125			HRT1600125
	160			HRT1600160
HRT16-1	80	HRT16-1	450	HRT16180
	100			HRT161100
	125			HRT161125
	160			HRT161160
	200			HRT161200
	250			HRT161250
HRT16-2	125	HRT16-2	660	HRT162125
	160			HRT162160
	200			HRT162200
	250			HRT162250
	300			HRT162300
	315			HRT162315
	355			HRT162355
	400			HRT162400




HRT16 Fuse

Standard: IEC 60269

Overall Dimensions

Unit: mm

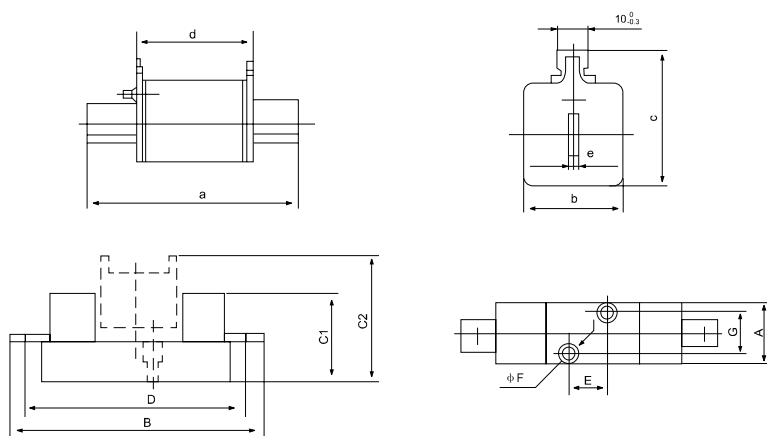

Type	HRT16-00C	HRT16-00	HRT16-1	HRT16-2	HRT16-3
a	78.5	78.5	135	150	150
b	21	29	48	58	67
c	57	57	62	72	85
d	49	49	67	67	67
e	6	6	6	6	6
A	-	30	58	64	64
B	-	120	200	250	250
C1	-	61	83	99	105
C2	-	85	96	112	120
D	-	100	175	200	210
E	-	25	25	25	25
F	-	7.5	10.5	10.5	10.5
G	-	—	30	30	30